

MINI Y-BLOCK

The Mini Y-block can assist you in adding one cable to an existing duct with cables inside.

Fixed connections

The Mini Y-block is made with either 40-40 mm and/or 50-40 mm fixed connection. This means it can be freely reversed and connected to similar existing ducts in the ground. Upon request other custom made sizes can be produced.

Fits in the handhole

The Mini Y-block fits in most of the smaller handholes. It can withstand air/water pressure up to 25 bar (362 psi).

Uses the same cable sealings as the rest of the Fremco blocks


DON'T FORGET TO ORDER

Cable seals

Different variants in sizes between 4-25 mm

SPECIFICATIONS

Item No (40-40 mm):	KA60500-40
Item No (50-40 mm):	KA60500-50
Pressure resistance:	Max. 25 bar (362 psi)
Length:	120 mm (4.7")
Width:	110 mm (4.3")
Height:	60 mm (2.3")
Weight:	4.3 kg (9.5 lbs)

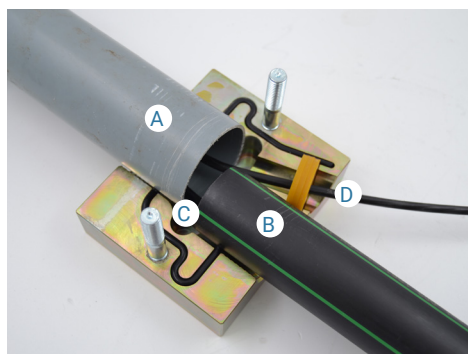

- A) 50 mm existing duct
- B) 40 mm supply duct
- C) New cable
- D) Existing cable

